
CREON KOZIJNEN

PremiDoor Hef Schuifpui

Hef Schuifpui

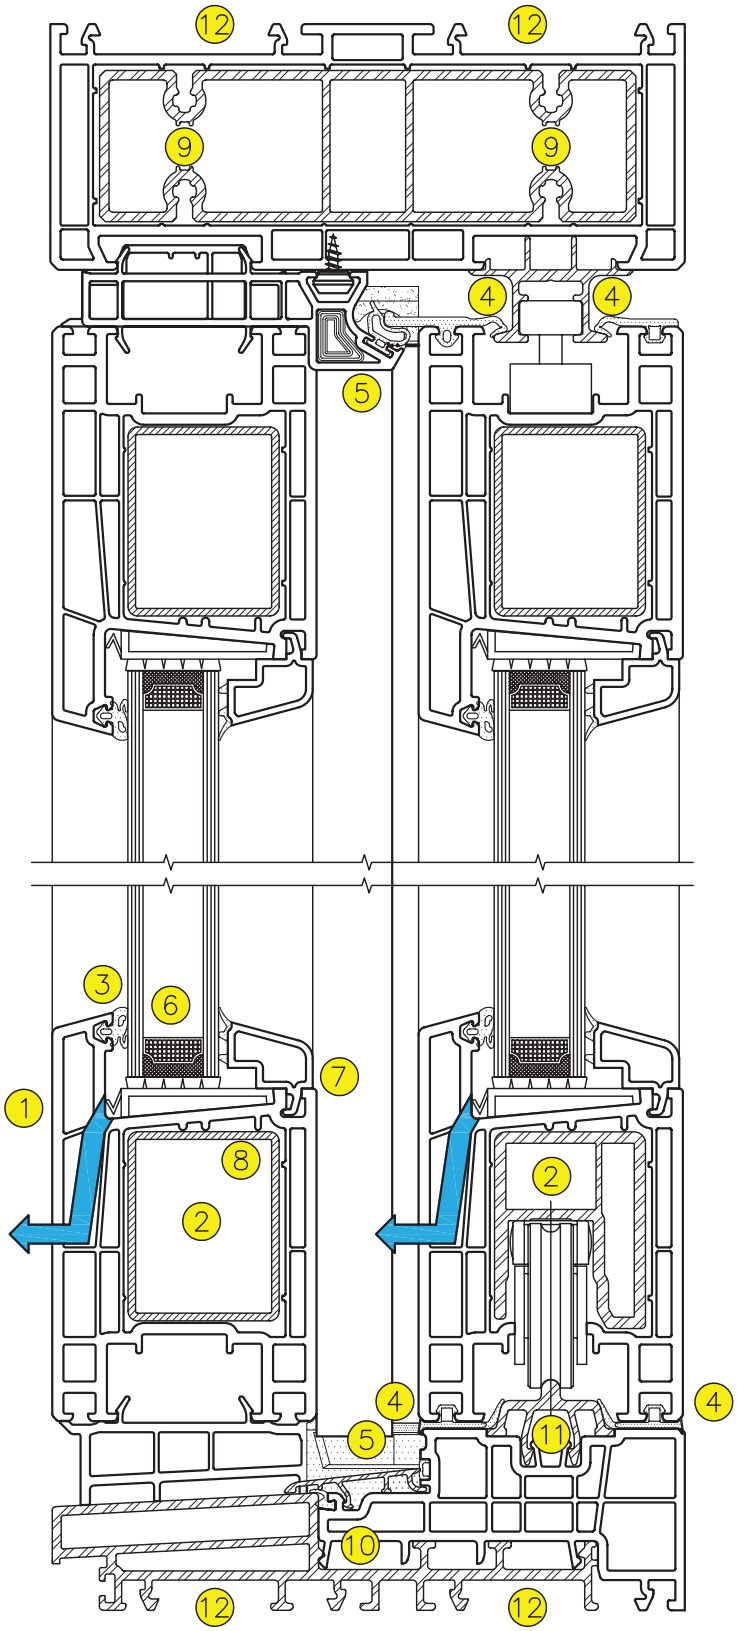

1. High-insulation profile cross section with 70 mm installation depth
2. Large-scale steel reinforcements with high static properties and precision-fitted hardware
3. Peripheral EPDM glazing gasket
4. High-tech two-component gasket ideal for permanently loaded moving parts
5. Special elements for effective sealing
6. Range of glass thicknesses up to 39 mm
7. Backset glazing bead with shortened coextruded sealing lip for greater visual appeal and easier cleaning
8. Support cams act as a barrier against heat transfer by positioning and securing the steel reinforcement at a distance
9. Concealed casement screw union in preformed receivers
10. Threshold with optimal thermal break
11. This track variant facilitates barrier-free designs
12. Designed as the perfect building con-nector

CREON KOZIJNEN
Creon Online
T: +31 10-3400087
www.creon-kozijnen.nl
E: support@creon-kozijnen.nl